

BNC Male Straight SF085, SR085, RG405


P.N. : A02-M1324-03

Products feature

- Reliable V.S.W.R
- Easy maintenance

Electrical specification

Item	Specification
Frequency range(GHz)	DC ~ 4 GHz
Impedance (Nominal)	50Ω
Contact Current	DC 3.5A max.
Voltage rating	500V rms
Insertion Loss	0.5dB max at 3GHz
Life	500 mating
Coupling Nut torque	0.07Nm min ~ 0.25Nm max
Temperature	-65°C ~ 85°C
RoHS	Compliance

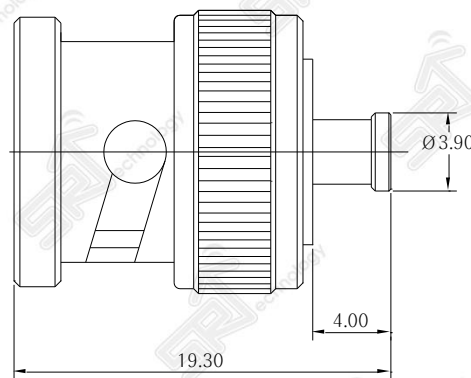

Material specification

Item	Specification
Connector Body	Brass / Gold plating
Center Contact	Male / Gold plating
Insulator	PTFE
Ferrule	Brass / Nickel plating
Cable Type	SF085, SR085, RG405