

7/16DIN Connector


The Best Wireless Solution!

7/16DIN Male 7/8" Super Flex.

P.N. : A05-M1431-01

Electrical Specification

Item	Specification
Frequency range	DC~3GHz
Impedance	50 Ω
V.S.W.R.	1.20 (Max)
Insertion Loss	0.15dB (Max)
Connector Retention	500 Cycles Min
PIMD (2 X 20W)	- 150 dBc
Insulation Resistance	10,000M Ω min.
Working Voltage	2.7 kV rms, 50Hz
Temperature	- 30°C ~ 60°C
IP Rating	IP 68

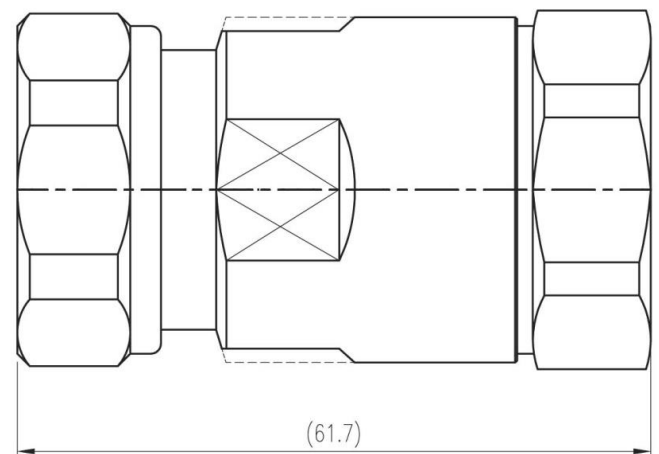

Material Specification

Item	Specification
Body & Coupling Nut	Brass / Nickel plating
Center contact	Brass / Silver plating
Insulator	PTFE
Cable type	7/8" Super Flexible