

SMB Female Right Angle RG174, RG316


P.N. : A08-F1113-11

Products feature

- Reliable V.S.W.R
- Easy maintenance
- Wide broadband frequency application

Electrical specification

Item	Specification
Frequency range	DC ~ 4.0 GHz
Impedance (Nominal)	50Ω
VSWR	1.35 : 1 Max
Contact Current	DC 1.5A max.
Voltage rating	250V rms
Life	500 mating
Engagement force	Max. 63N
Temperature	-65°C ~ 85°C
RoHS	Compliance

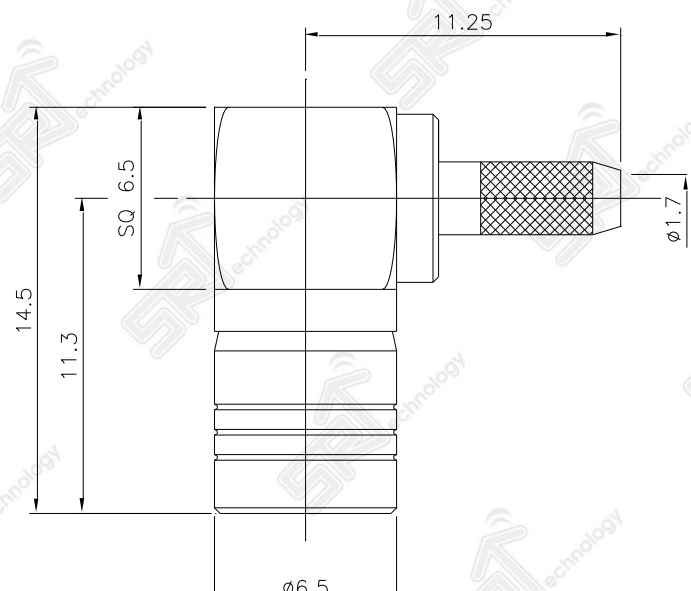

Material specification

Item	Specification
Connector	Brass / Gold plating
Connector Body	Brass / Gold plating
Center Contact	Be-Cu / Gold plating
Cable	RG174, RG316