Connector

2.4mm Solderless Connector

Item code: A17-F2003-01

Product feature

- DC~50GHz, broad application
- With solderless, minimized error percentage
- Various application for the Telecommunication
- Simple installation




Electrical Specification

ltem	Specification
Frequency range	DC~50GHz
VSWR	1.45 : 1
Insertion Loss	0.35dB [I/L = $0.05*(f_GHz)$]
Connector type	2.4mm Female

Material Specification

ltem	Specification
Body	Stainless Steel / Passivated
Center contact	Beryllium Copper / Gold plating
Insulator	Polyetherimide
Temperature	-65°C ~ +85°C

Drawing

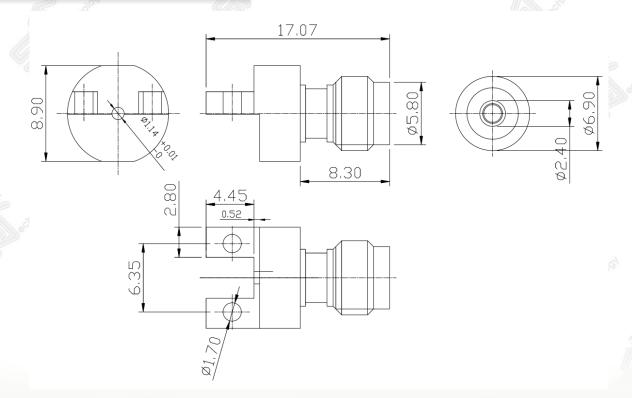



Tel: (+82)2-866-9003 Fax: (+82)2-6280-9333 www.srtechnology.com sale@srtechnology.com