

DC BLOCK


The Best Wireless Solution!

SMA DC BLOCK 18GHz (Inner)

P.N. : H01-A0018-01

Electrical specification

Item	Specification
Frequency range	10MHz ~ 18.0 GHz
Impedance (Nominal)	50Ω
V.S.W.R (Max)	1.35 : 1
Insertion loss	1.0dB Max
Voltage	50 V
Connector type	SMA male – female
RoHS	Compliance

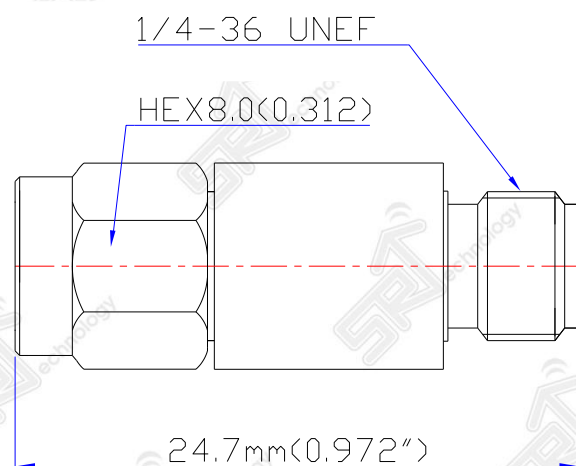

Electrical performance

Material specification

Item	Specification
Center Contact (pin)	Brass, Beryllium copper / Gold plating
Body	SUS / Passivated.
Insulator	PTFE

